

## WINDOW PROFILES

Window profiles are used in the fabrication of steel windows and doors, framed panels, framed glass display enclosures for commercial use, frames for framed ceilings and a host of other applications.

The product is manufactured by a cold forming process that offers excellent control over dimensions. This enables the fabricator to produce frames in a more efficient manner, resulting in the most economical and attractive window framing system.

There are three basic profiles – "Z", "T", and "L". Z and T are available in two sizes, small and large. L is in one size only. All profiles come in a choice of wall thicknesses – 1.2 or 1.5mm.

Each profile interlocks, thus allowing the user to lay out the frame prior to fabrication.

### PRODUCTS


Product shape	Nominal dimensions	Wall thickness	Nominal mass per unit length	No. of tubes per bundle
	mm	mm	kg/m	
Window Profiles: "L"	32 x 25 x 22	1.2	1.14	50
	32 x 25 x 22	1.5	1.42	50
"Small Z"	25 x 25 x 15	1.2	0.99	50
"Small Z"	25 x 25 x 15	1.5	1.15	50
"Big Z"	32 x 32 x 25	1.2	1.33	50
"Big Z"	32 x 32 x 25	1.5	1.66	50
"Small T"	32 x 18 x 15	1.2	0.92	50
"Small T"	32 x 18 x 15	1.5	1.15	50
"Big T"	42 x 22 x 25	1.2	1.33	50
"Big T"	42 x 22 x 25	1.5	1.66	50

- NOTES:**
- The above products are provided in standard lengths of 6m.
  - The dimensions for the window profiles are stated with the longest side first, then the opposite side and then the outer distance between the two.




WINDOW PROFILES


## DEFORMED HIGH TENSILE BARS

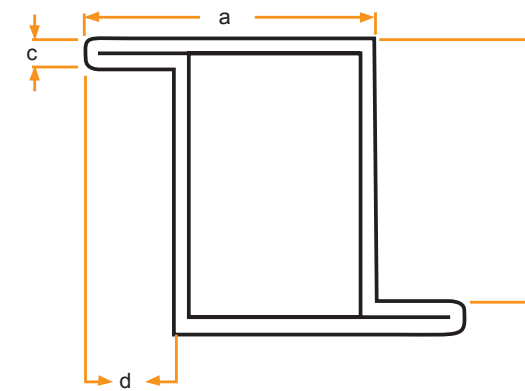


Big "Z" Section

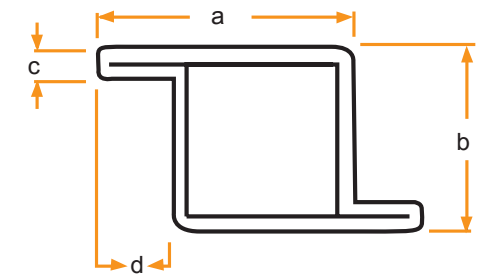


Small "Z" Section

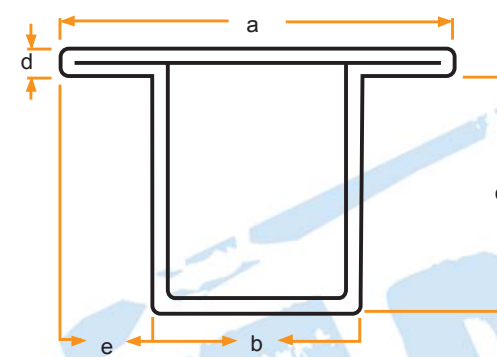

Big "T" Section

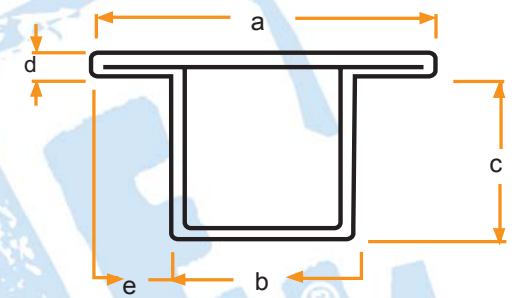

Small "T" Section

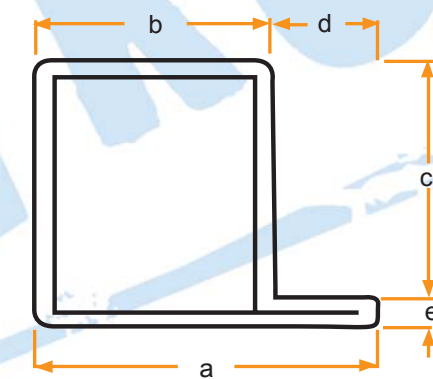

"L" Section

### DIMENSIONS (mm)

Product	a	b	c	d	e
L	32	22	22	10	3
Small Z	25	15	7	3	-
Big Z	32	29	3	10	-
Small T	32	18	15	3	7
Big T	42	22	25	3	10



Race Course Road, Arima, Trinidad, West Indies  
 Tel: (868) 642-0672/0872/2340/0771/7833/646-0889 Fax: (868) 642-5333 Sales: (868) 642-1780 email: csmsteel@tstt.net.tt